

Tehnološka uputstva za završno predmontažu dvodna i montažu na navozu

Donadić, Dorian

Supplement / Prilog

Publication year / Godina izdavanja: **2022**

Permanent link / Trajna poveznica: <https://um.nsk.hr/um:nbn:hr:190:331650>

Rights / Prava: [In copyright](#)

Download date / Datum preuzimanja: **2022-11-28**



Repository / Repozitorij:


[Repository of the University of Rijeka, Faculty of Engineering](#)



FAZA V

GR.3410, VT01 - 209,5 t

(sa opremom ~222 t)

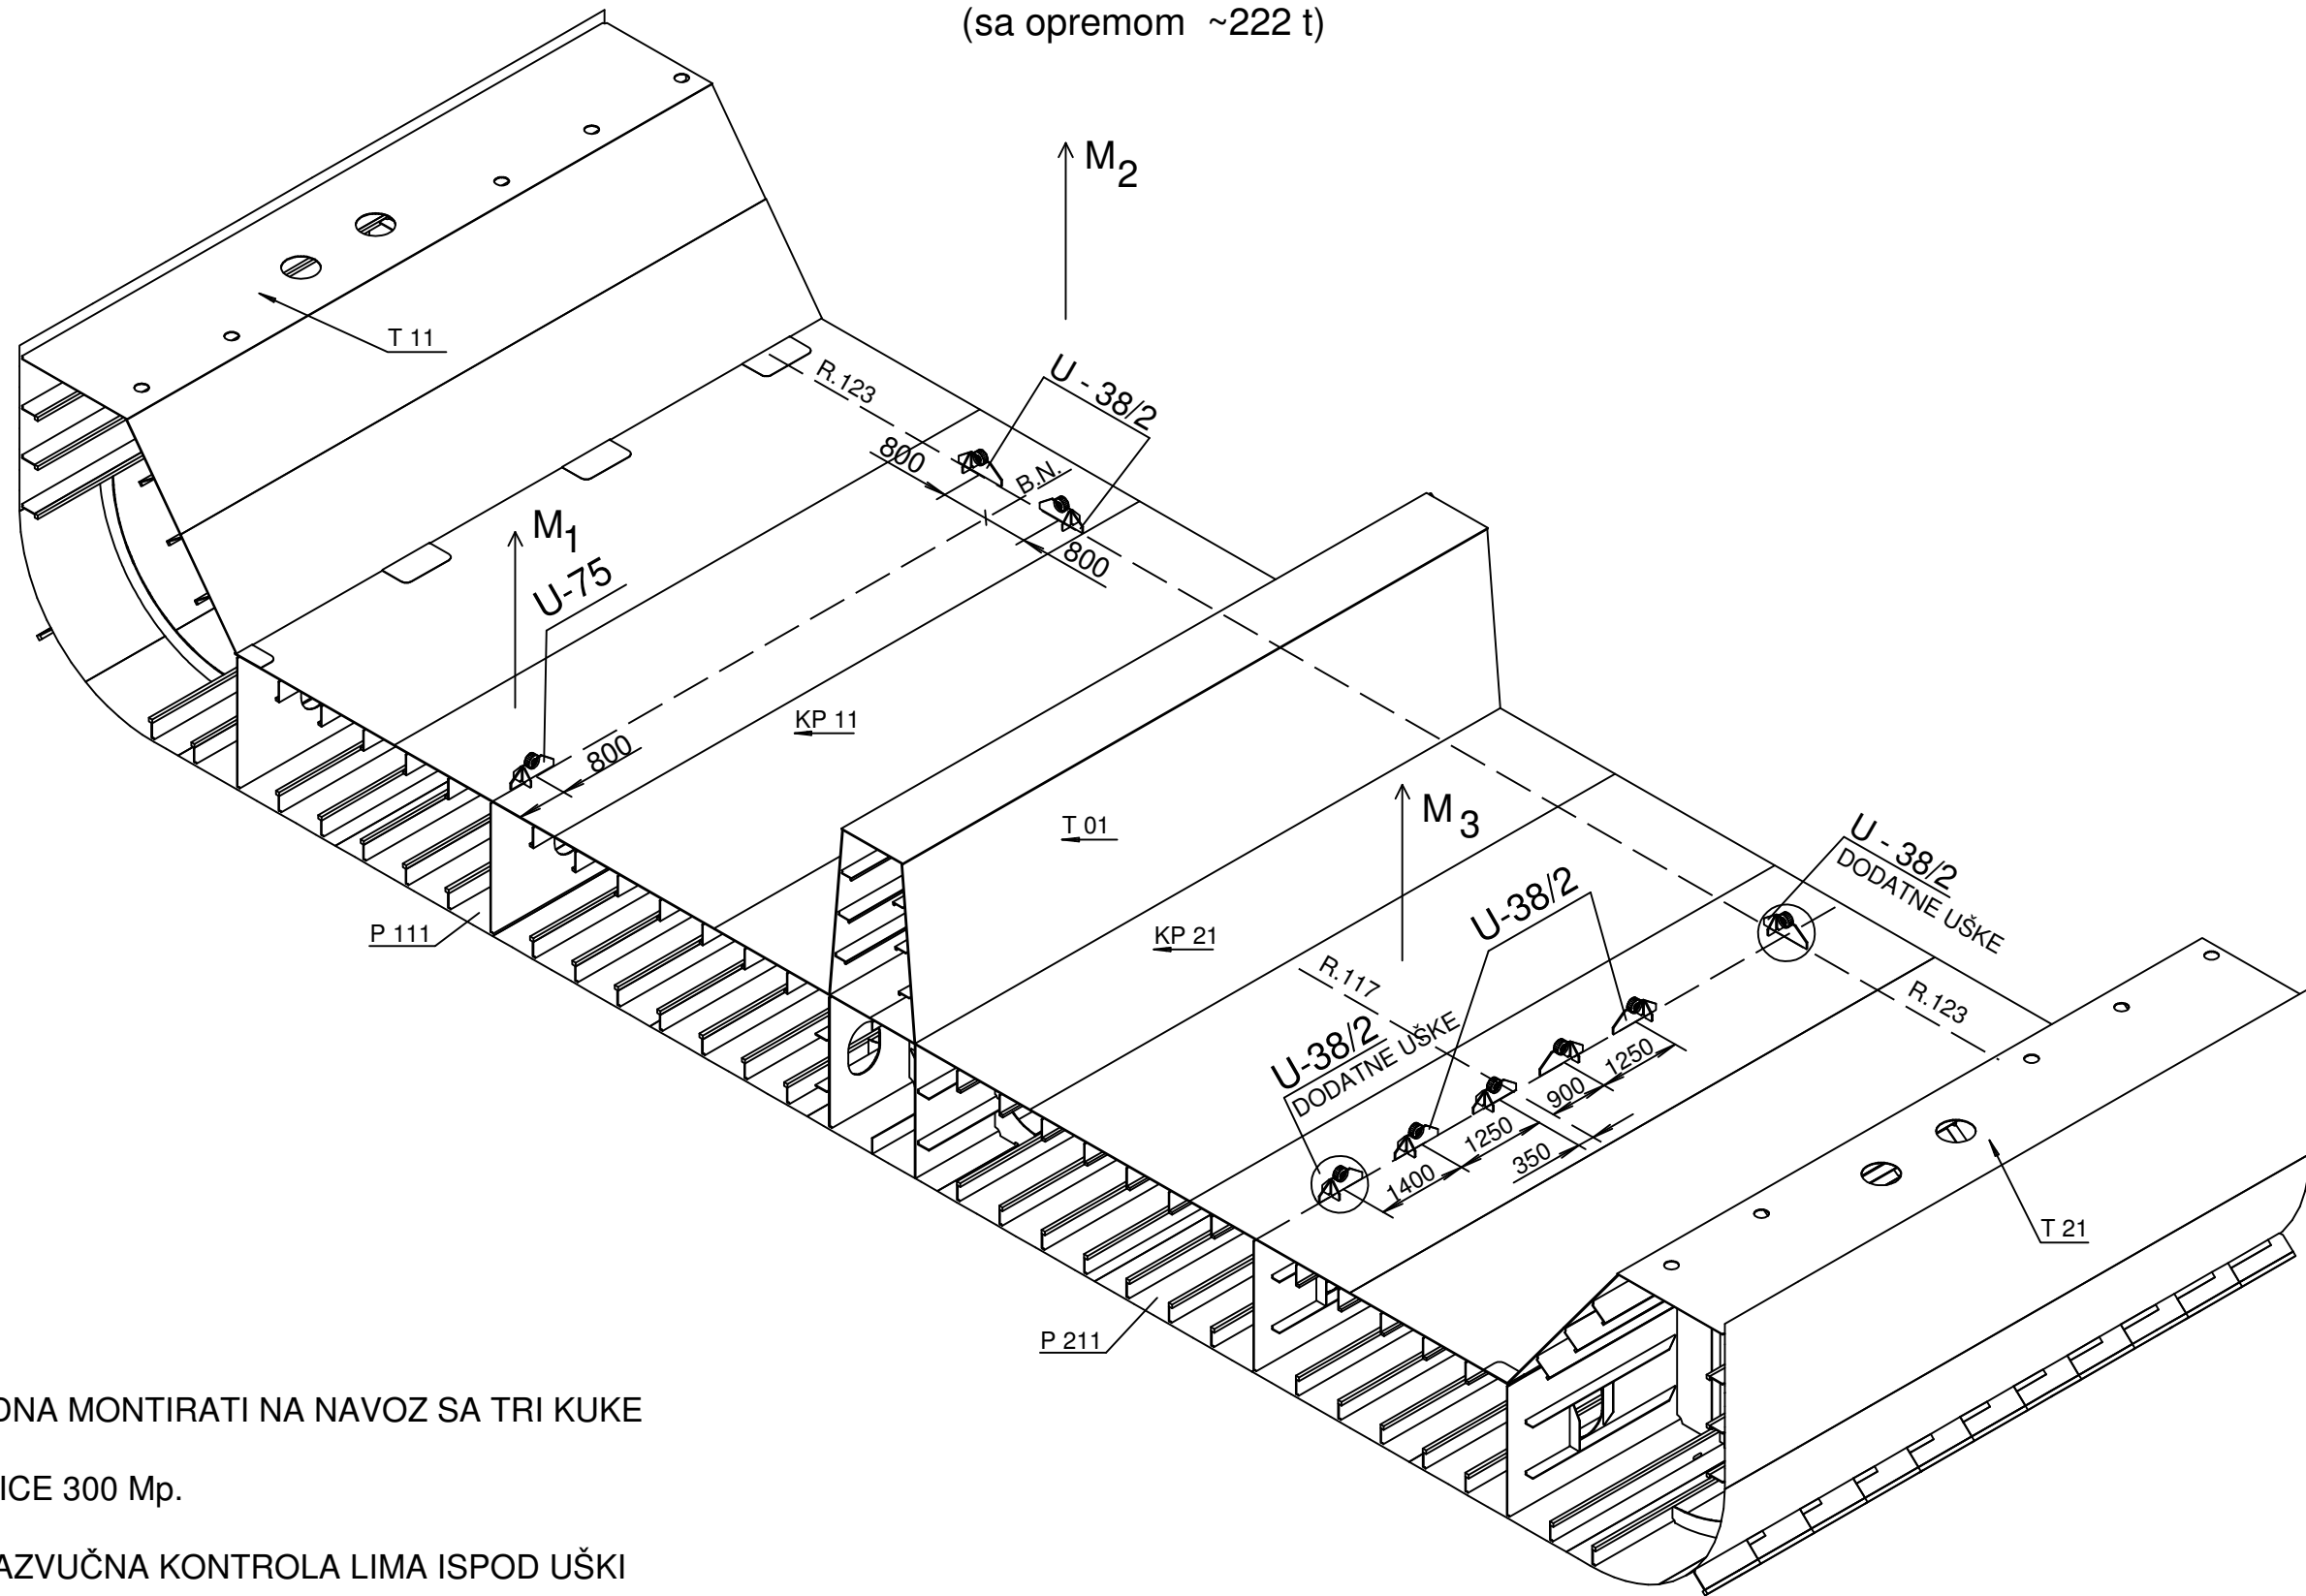

NAPOMENA:

- VT SEKCIJU DVODNA MONTIRATI NA NAVOZ SA TRI KUKE

M1, M2 I M3 DIZALICE 300 Mp.

- OBAVEZNA ULTRAZVUČNA KONTROLA LIMA ISPOD UŠKI

- STRUKTURU U PODRUČJU UŠKI ZAVARITI NA \triangle^6

A3TEHNOL

| | | | |
|-------------------------|-----------------------|-------------------|---|
| P.N. 10710 | NACRT BROJ: T-3633 | LIST: LISTOVA: | TEZINA: 209529 TEZISTE X: FR118-83.0 |
| SKLOP: 3410-VT01 | | | TEZISTE Y: -2 |
| DATUM: | | | TEZISTE Z: 1694 |